


Part List Per Kit

Part	Part #	Description	Qty.
A	11-90HHDD	0.5" Solid Plastic Cover Panel (HHDD=Height and Depth)	1
В	40-3264320	Screw #14 x 3/4"	6


Recommended Tools: T27 Torx bit, Drill and Ø 3/16" drill bit, Clamps

Once lockers are installed, a cover panel can be added to the exterior of the last locker in the run to provide a finished look.

- Locate cover panel, place against exposed locker side (filleted edges out).
- Align the front face and top of the locker with the front and top edge of the cover panel (it is optional to clamp the locker and end panel together to prevent movement)
- Pre-drill 8 holes using a Ø 3/16" drill bit from the interior of the locker. Approximate locations shown below (C). Drill through the locker side into the interior of the cover panel (sides 3/8" thick for traditional or 1/2" thick for traditional plus lockers). Only drill 3/8" into the cover panel. **Do not drill through the cover panel.**



 Fasten the cover panel (A) to the locker using the screws provided (B) from the interior of the locker

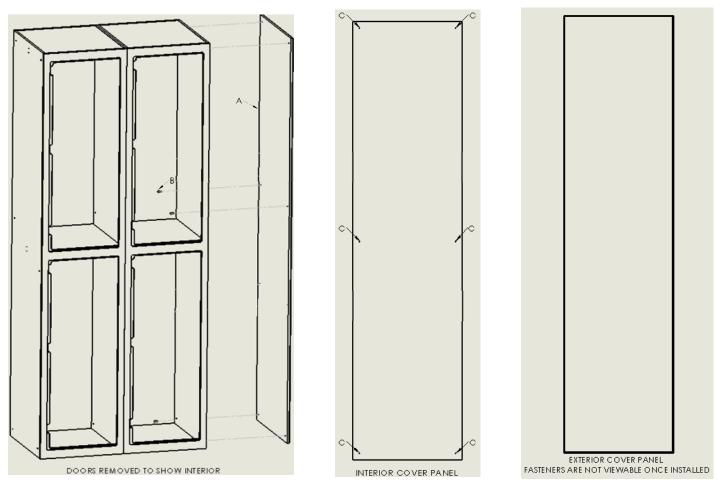

ASI Storage Solutions | 900 Clary Connector, Eastanollee, GA 30538 | (706) 827-2720 | www.asi-storage.com Issued: 2/2024 Page: 1 of 1